



MFV

MULTI-FUNCTION VALVE

Installation and
operating instructions



net.grundfos.com/qr/i/96772109



be
think
innovate



GRUNDFOS 




2x

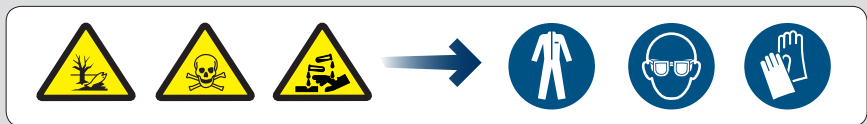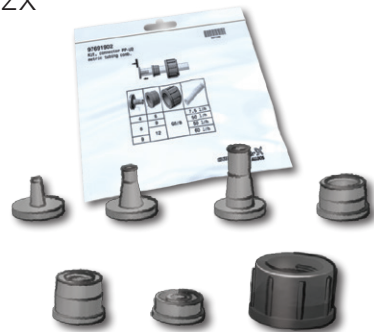



	PVC/PP	PVDF
 < 12 bar (< 174 psi)	0°C – +40°C (32°F – 104°F)	-10°C – +40°C (14°F – 104°F)
12 – 16 bar (174 – 232 psi)	0°C – +20°C (32°F – 68°F)	-10°C – +20°C (14°F – 68°F)


$p_{\max} = 16 \text{ bar (232 psi)}$

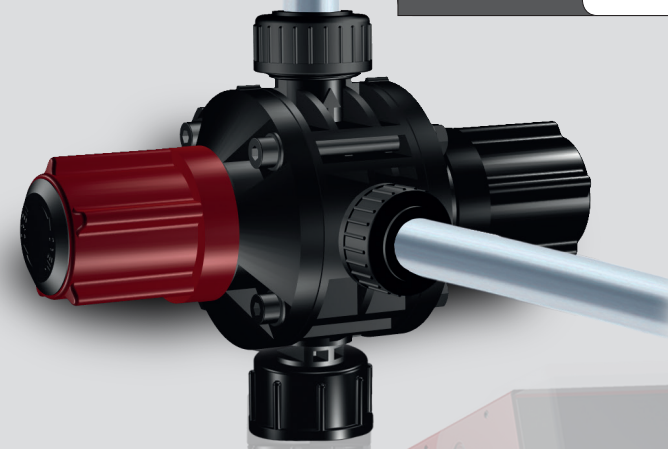


 < 12 bar (< 174 psi)	0°C – +40°C (32°F – 104°F)
12 – 16 bar (174 – 232 psi)	0°C – +20°C (32°F – 68°F)



i




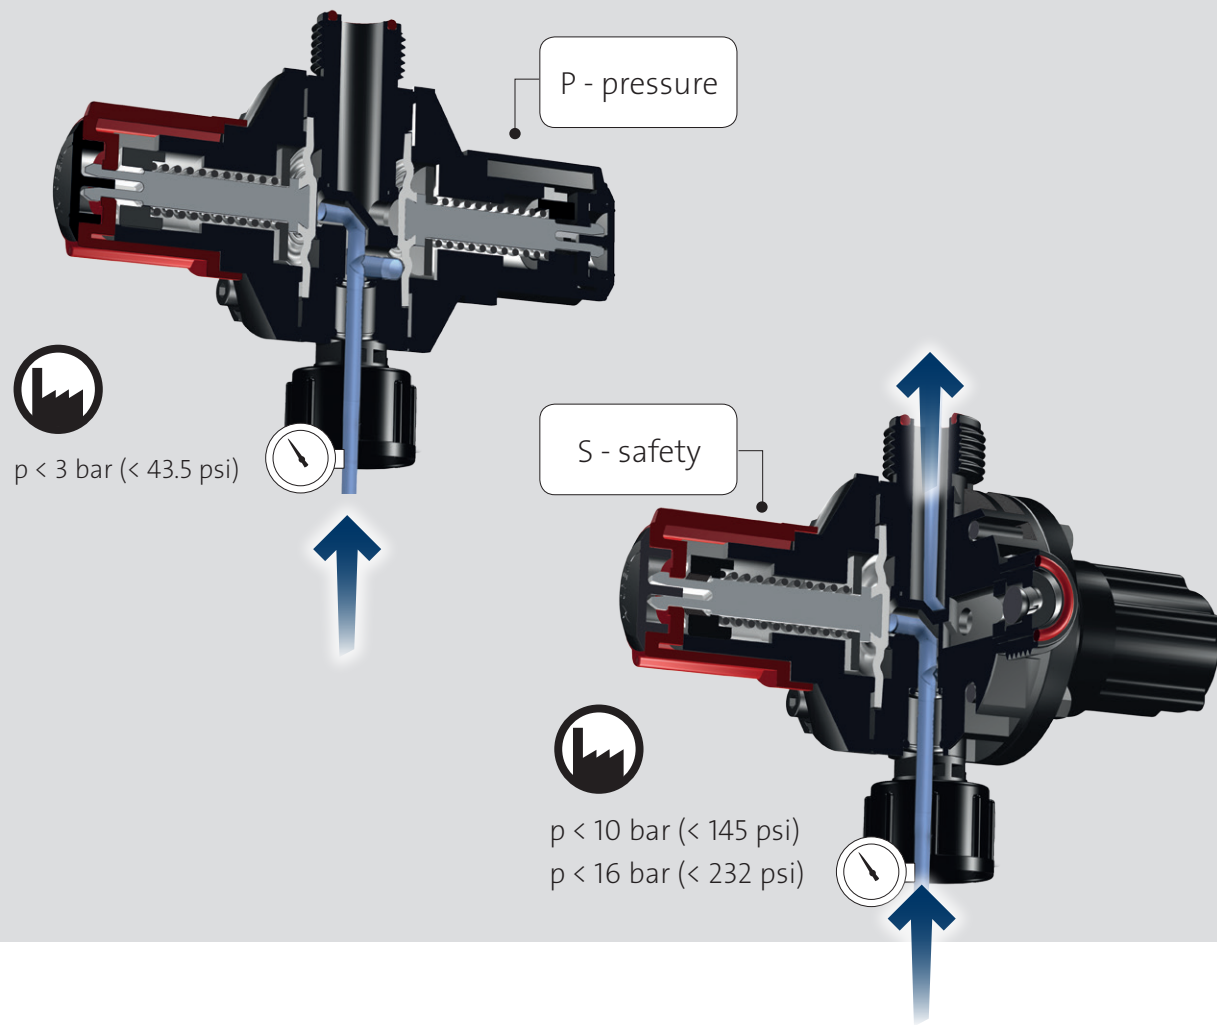


i




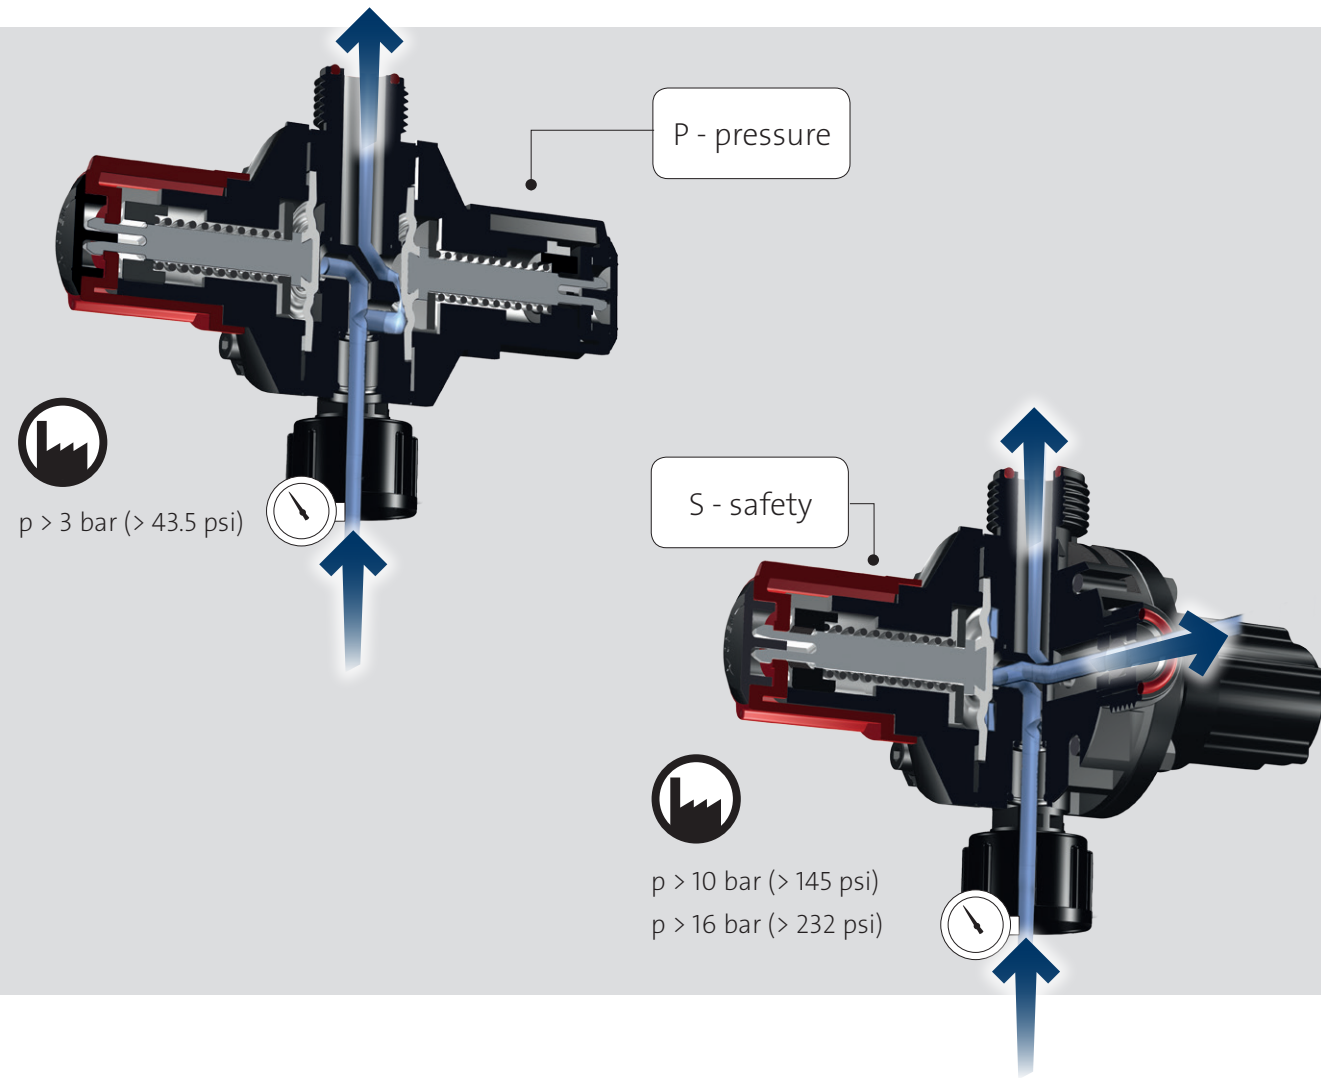






1

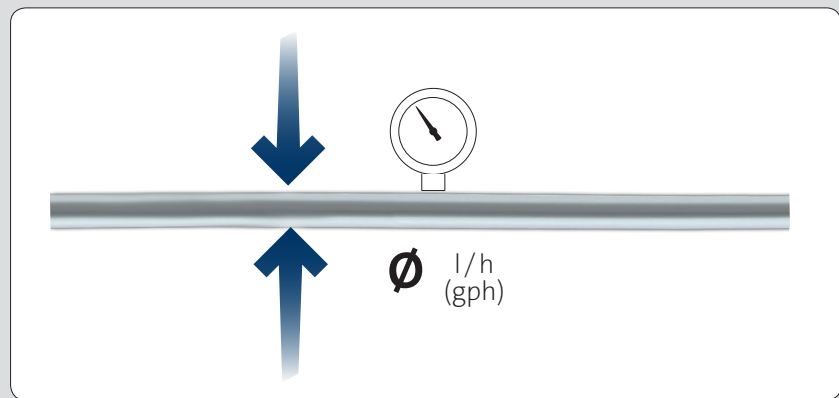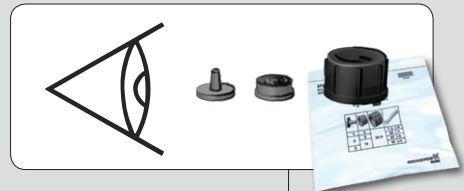


2

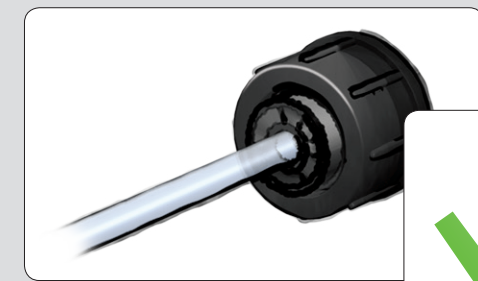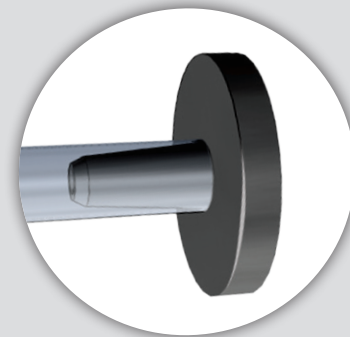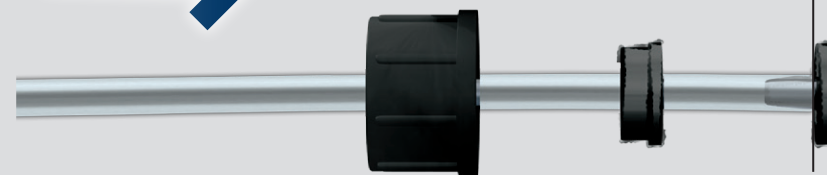

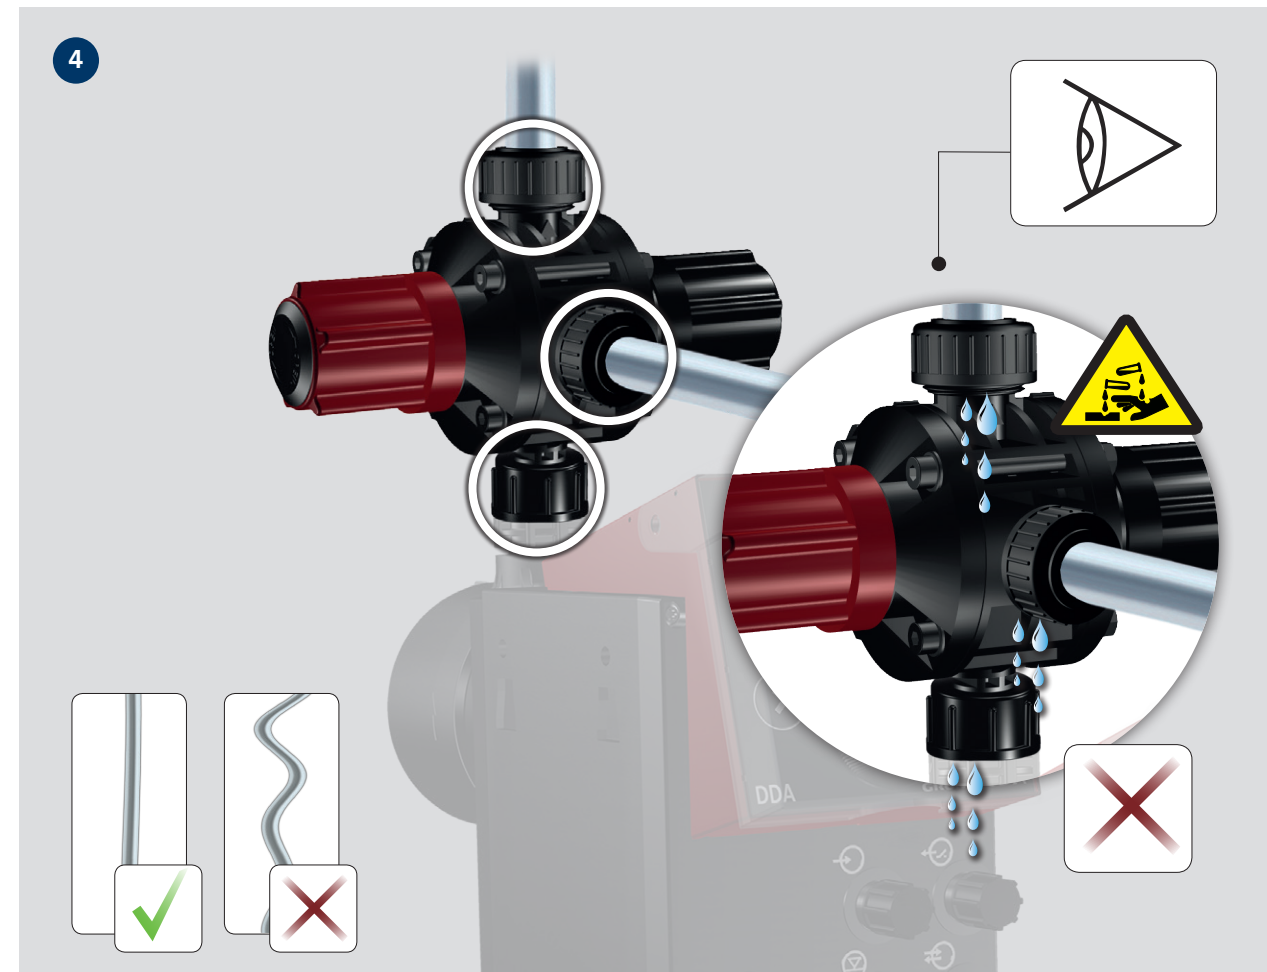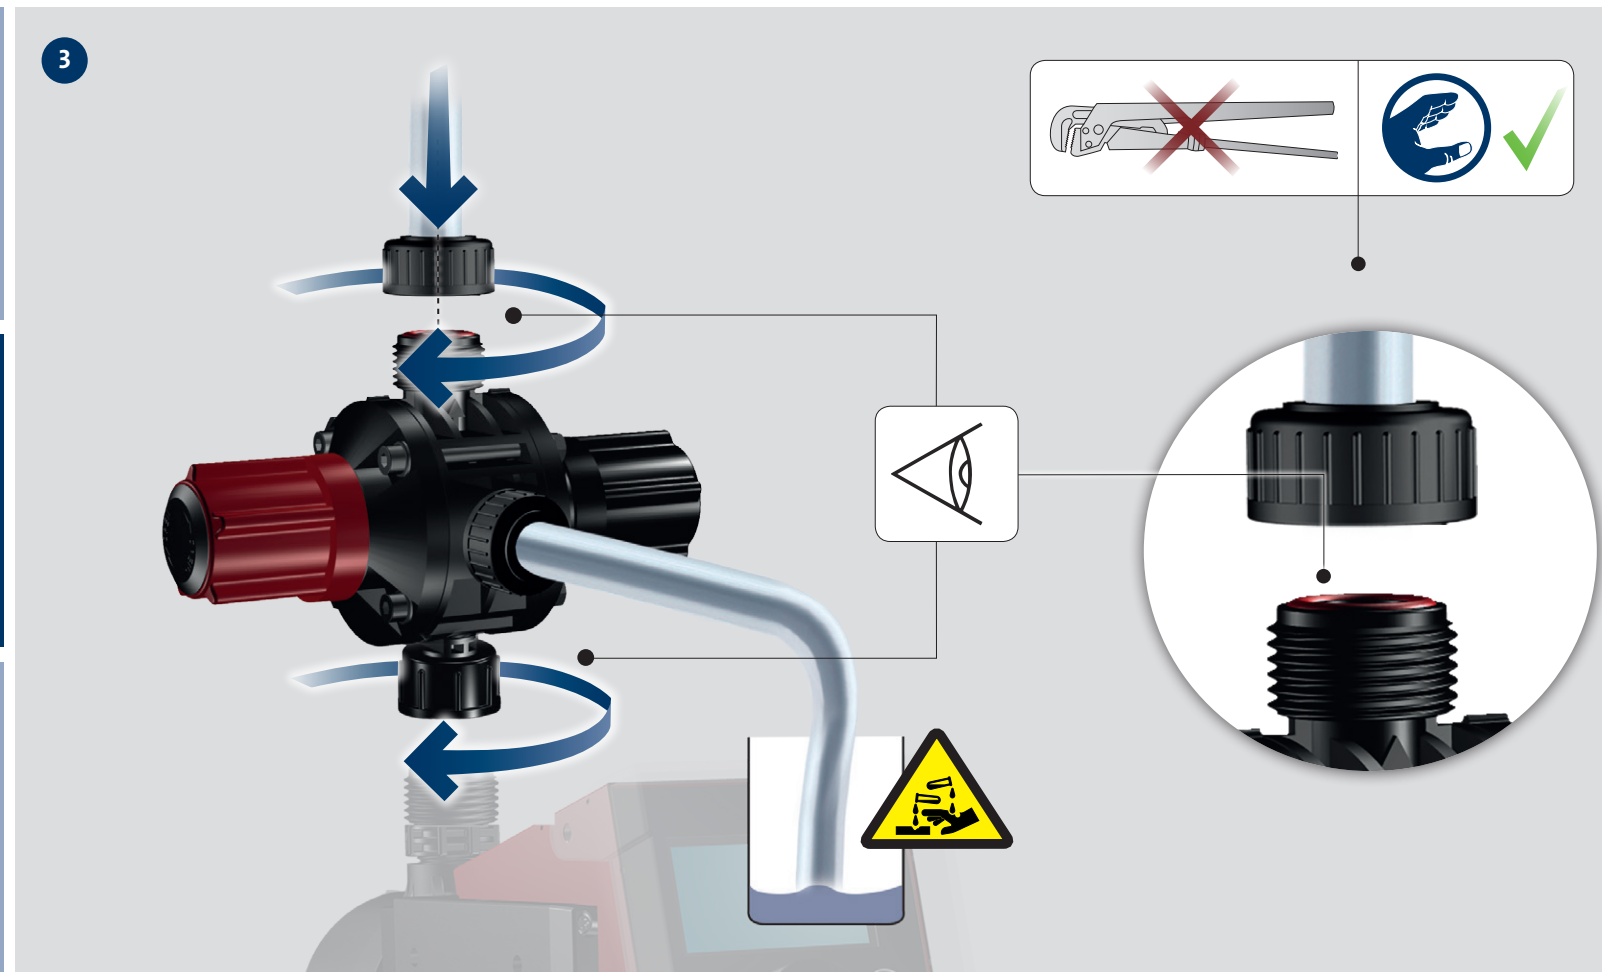





i

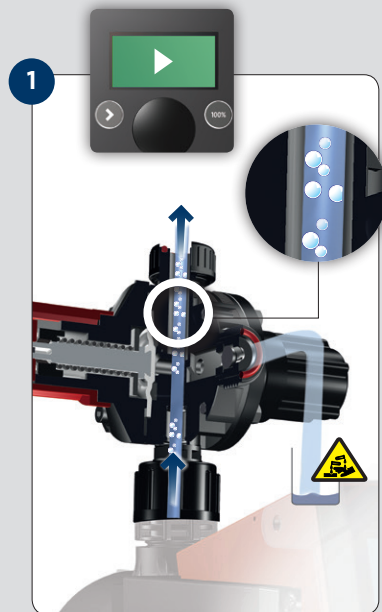

2

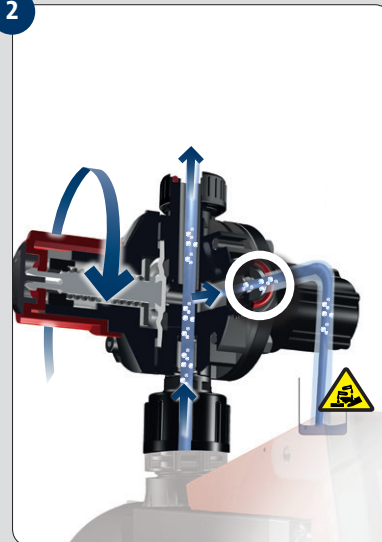


3

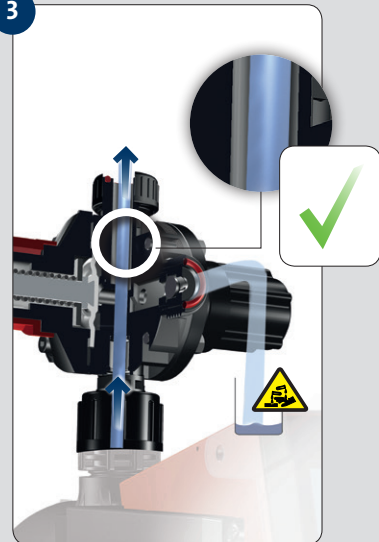


i




1

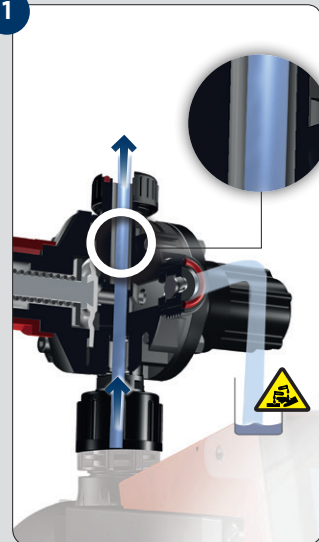



2

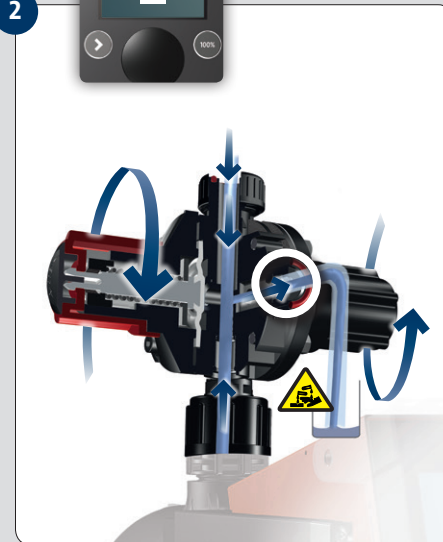

3

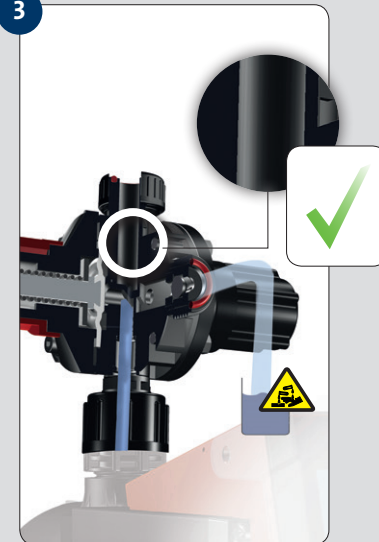

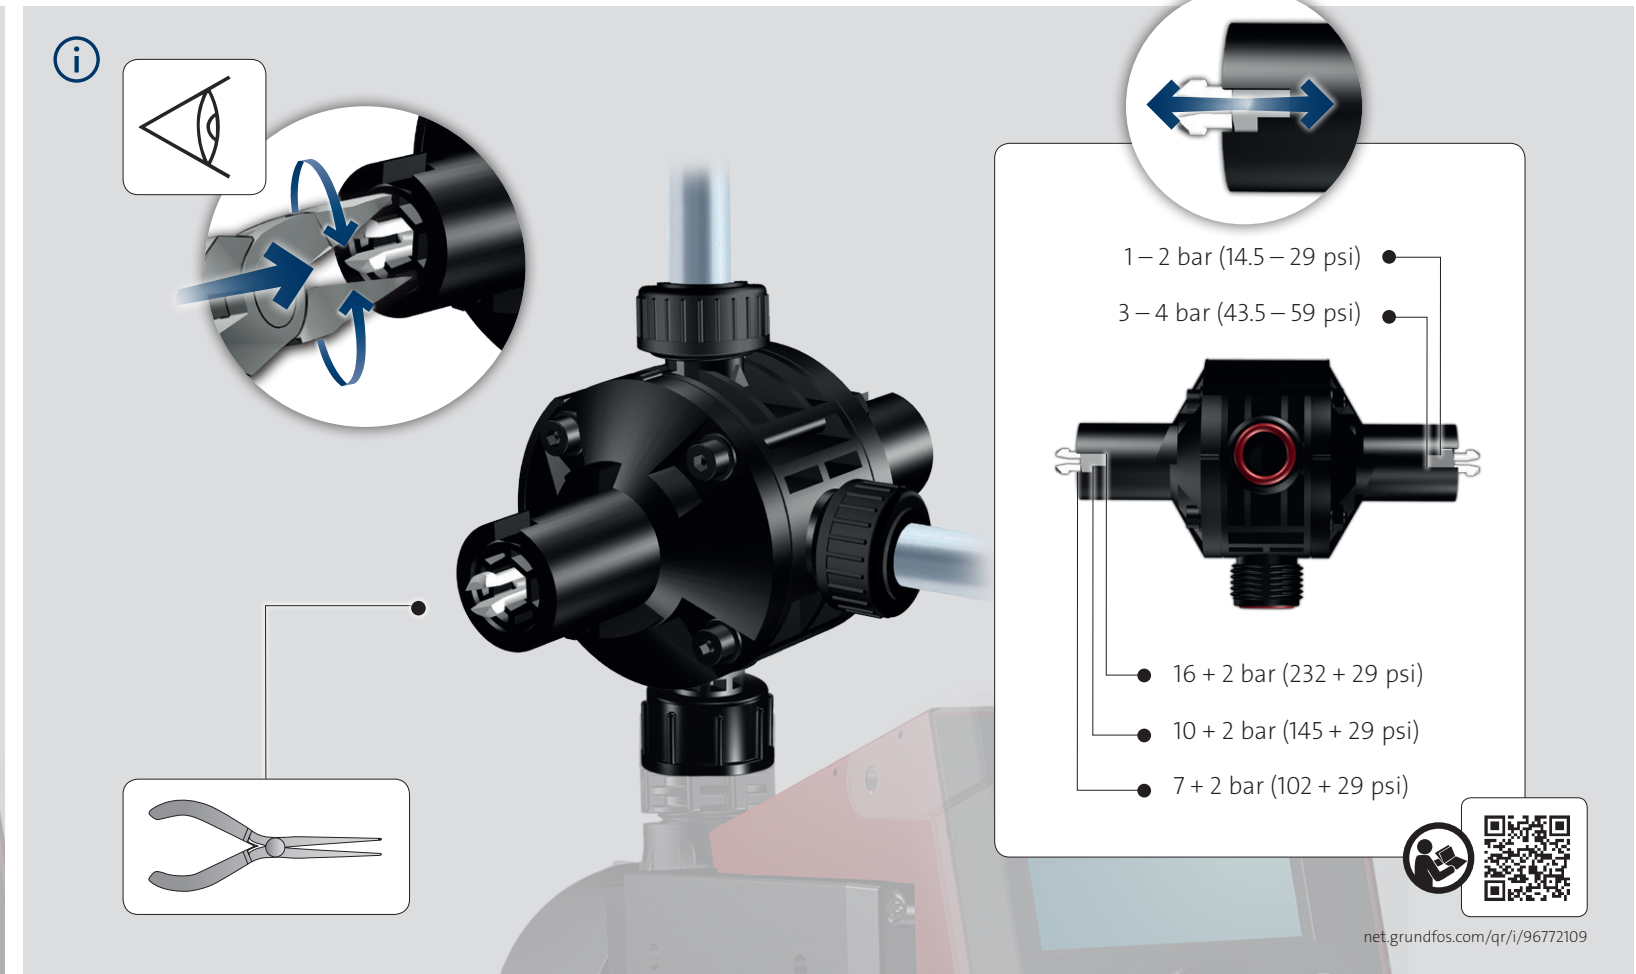

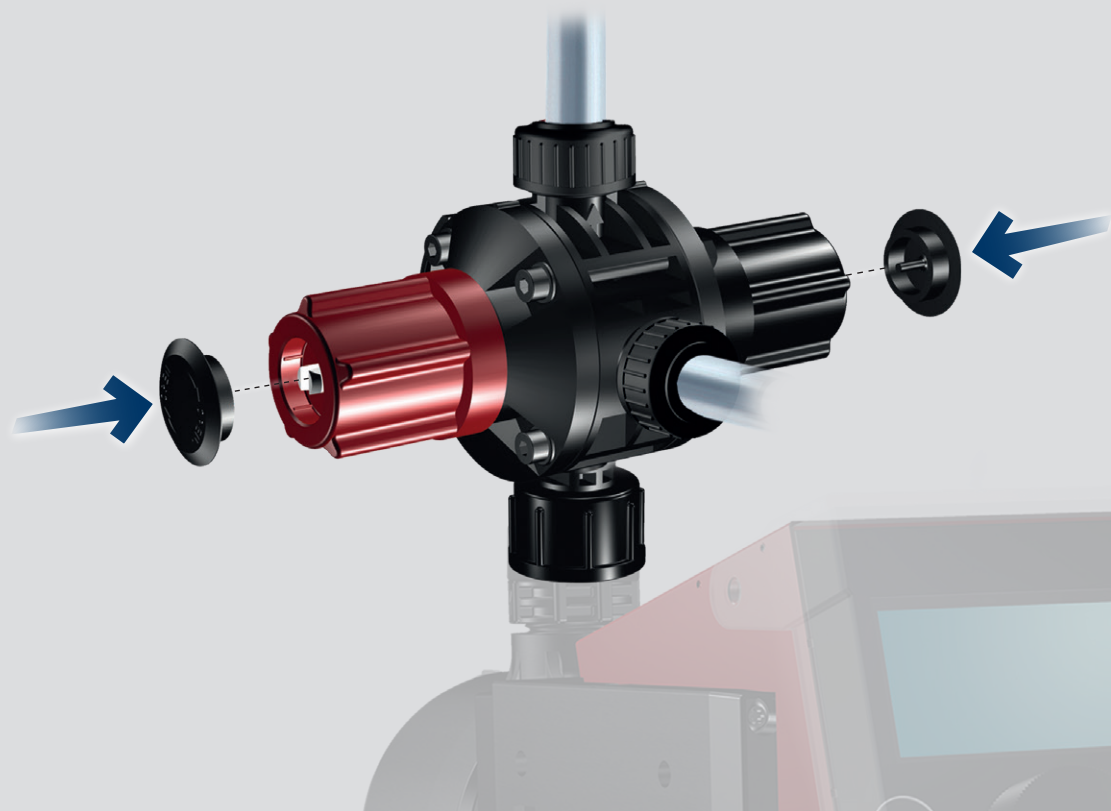





95731175 0517

ECM: 1204328

GRUNDFOS Holding A/S
Poul Due Jensens Vej 7
DK-8850 Bjerringbro
Tel.: +45 87 50 14 00
www.grundfos.com

GRUNDFOS 

The name Grundfos, the Grundfos logo, and be think innovate are registered trademarks owned by Grundfos Holding A/S or Grundfos A/S, Denmark. All rights reserved worldwide.